

LED downlight DSL10.3PRO -GS

DESIGNLITE
AUSTRALIA

DESCRIPTION

A slim ceiling recessed LED downlight with high color rendering and uniform light surface with no shadowing. Dimmable with most Leading Edge and Universal Dimmers. Replaces conventional downlights 1 x 50W and offers up to 80 % energy saving. Beam angle 60 °. Electronic: fixed output control gear. Choice of 3000K or 4000K to suit application. Thermally optimized aluminium body. Fitted with flex and plug.



DETAILS

Body: Aluminum

Diffuser: Reflector UV stabilized Complete with 3000K LED, 961 lm. Class II electrical, IP54 (from below) IP40 (from above), IK08.<3 SDCM LED CHIP CRI>95 R9>82 UGR<19 Flicker Free Driver

Luminaire efficacy: 100lm/W

Rated median useful life: 50.000h L70B50 at 25°C

Weight: 0.5 kg


Cutout (mm): Ø88-Ø93

Dimension(mm): Ø100*60



LIGHT DISTRIBUTION

Legend: All planes - Solid (cd)

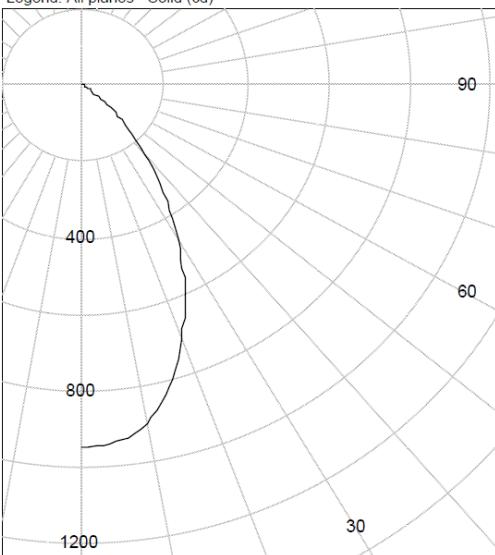

- Beam angle of 60deg
- Aluminium body
- 50000hrs*
- L70/B10
- Warranty 5 years*
- 100lm/w - 9.6w
- 961.3 lumens
- Power factor 0.95
- IP54
- IC-4
- CRI>95
- low glare UGR <19
- SAA certification
- CCT: 3000K,
- Dimming: Leading edge
- Optional: 1-10v , Dali
- LM80
- LM79
- IES file
- 3 pin flex and plug base

PRO
Specifications



CRI ≥95

ip54



50000 HOURS

